

IW-RA102

1U Compact Rackmount Server Chassis



Features & Benefits

- Powerful 1U appliance chassis with 15" depth for space-sensitive
 - Fully utilized for HDD capacity
 - Outstanding thermal solution
 - Front access USB x 2 Ports
- 2.5" hot-swap HDD x 2 for hot-swap application

IW-RA102

1U Compact Rackmount Server Chassis




Front view



Rear view




Inside view

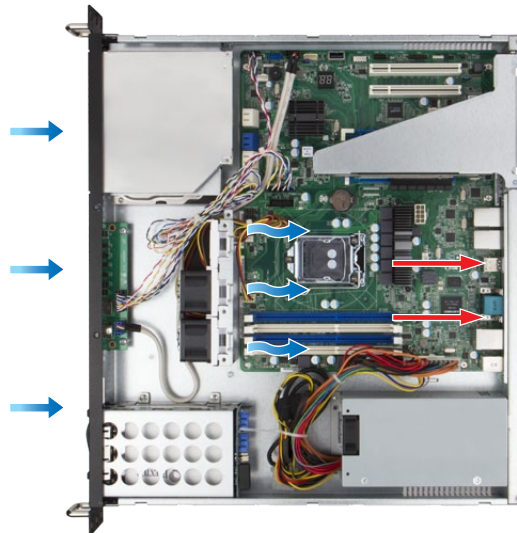

Features



- ◆ 12" x 9.6" ATX server board



- ◆ Optional PCI-E riser card and riser card bracket



- ◆ Supports 1U Flex form factor PSU (Watt up to 400W)



- ◆ Accommodates up to 3.5" x 1 internal HDD + slim ODD x 1



- ◆ External 2.5" hot-swap HDD x 2



- ◆ Supports 40 x 28 mm PWM Fan x 3




- ◆ Optional railing system

IW-RA102

1U Compact Rackmount Server Chassis



Dimensions (DxW)

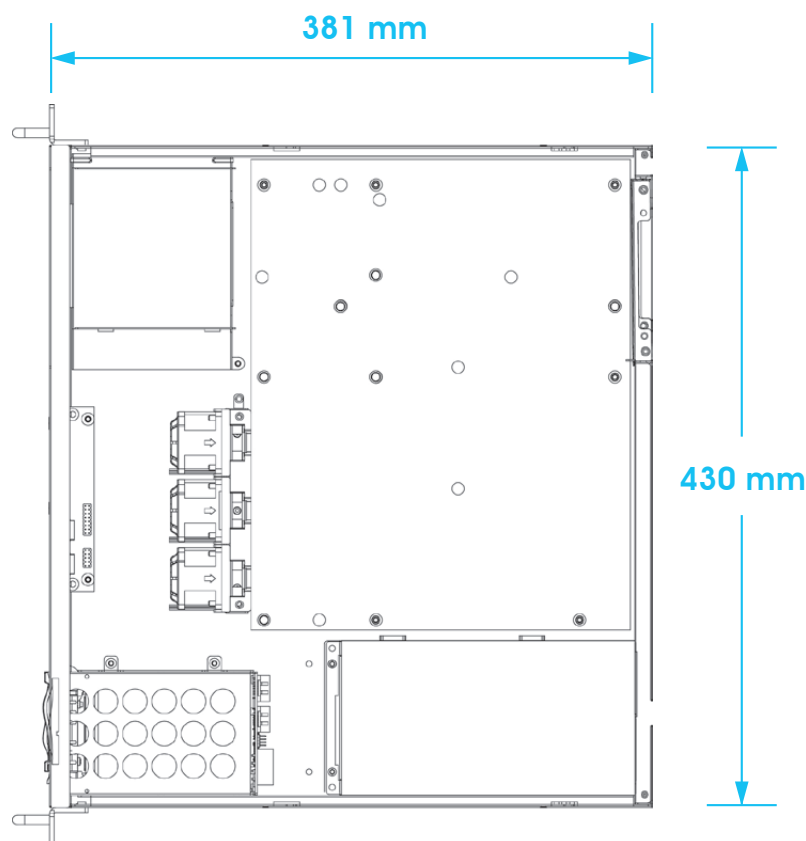

Specifications

Standard	EIA-RS310D
M/B Form Factor	ATX (12" x 9.6")
Dimensions (D x W x H) w/o Front Panel	381 x 482.6 x 44.4 mm (15" x 19" x 1.75")
Drive Bay	Internal: 3.5" x 1 External: Hot-Swap 2.5" x 2, Slim ODD x 1
Power Supply	Supports - Form Factor: Flex - Watt: up to 400W
Indicator	Power Status, HDD, LAN Activity LEDs
Front Control Panel	Power Switch, System Reset, USB 2.0 x 2
Cooling Fan	Supports 40 x 28 mm PWM Fan x 3
Expansion Slot	Full Height PCI Slot x 1 (via riser card and bracket)
Material	Material : SGCC Thickness : 1.0 mm
Packaging Dimensions (D x W x H)	592 x 518 x 155 mm
Shipping Information	Net Weight: 3.5 kg Gross Weight: 8.0 kg Cubic Feet: 1.8 Container Info Single Packing: 20': 440pcs, 40': 880pcs, 40'H: 1024pcs

Optional

FAN	POWER SUPPLY	SLIDE RAIL	CABLE	RISER CARD	OTHERS
-----	--------------	------------	-------	------------	--------

* For further information on accessories, please visit our website



* The actual product is subject to change without prior notice. In Win Development Inc. reserves the right to make final modifications.

* Above image for reference only. All hardware components are not included.