



IW-MS08-A

8 Bays Mini Server Tower

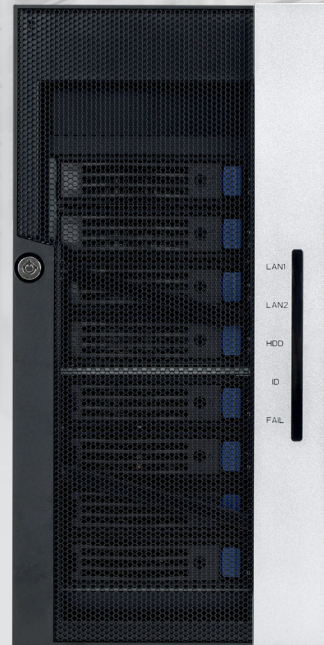

Features & Benefits

- Compatible with the Micro-ATX and Mini-ITX for Mini Tower Cases
- Up to 10 Storages Support 8 Hot-swap Bays and 2 HDD Brackets.
 - File Servers and NAS Devices Usage
 - Supports 4 Full Height PCIe Slots
- High Efficiency Gold Level Redundant Power Supplies
- Lockable Front Magnetic Door for Hardware Security



IW-MS08-A

8 Bays Mini Server Tower

Specifications

M/B Form Factor	Micro-ATX (9.6" x 9.6"), Mini-ITX (6.7" x 6.7")
Drive Bay	External: Slim ODD x 1 Hot-swap 3.5" x 8 3.5" x 1 (Floppy module) Internal: 2.5" x 2
Power Supply	Supports Form Factor: 1U Redundant 300W 1U Single 500W 1U Flex 315W
Indicator	Power LED, LAN1/LAN2 LED, System LED, ID LED, HDD LED
Front Control Panel	Power On/Off, Reset, USB3.0 x 2
Backplane	Mini-SAS HD(SFF-8643) 12Gb/s x 2 without Expander
Cooling Fan	8025mm PWM Fan x 4
Expansion Slot	Full Height PCI Slot x 4
Material	Material: SECC Thickness: 1.0mm
Product Dimension (D x W x H) w/o Front Door	513 x 170 x 340 mm (20.2" x 6.7" x 13.4")
Package Dimension (D x W x H)	630 x 450 x 310mm
Shipping Information	Net Weight: 10.37kg Gross Weight: 12.52kg
Container Information	Single Packing with Pallets: 20': 240pcs 40': 504pcs 40'HQ: 588pcs

12Gb/s Backplane Specifications

Model	SK34-02 4Bay 12G Backplane Module
Dimension (Wx H)	111.5mm x 111.5mm
Backplane Type	Passive
Host Interface	SFF-8643 x 2
HDD Interface	SAS/SATA 3.5" x 8

Optional Items

Item	Part Number	Description	Support Qty.
Power Supply	3RAMAP028900	EP1A5501B 1U Single 500W	1
	2RAKAP002700	R1BU5301B-G 1U Redundant 300W ASSY	1
	1DDU315AU20071	IP-P315AU7-2 1U Flex 315W Gold	1

* The actual product is subject to change without prior notice. In Win Development Inc. reserves the right to make any final modifications.

* Above image is for reference only. All hardware components and optional parts are not included.

